

Dipswitch Settings	OFF	ON
1. Safety Output	N.O.	N.C.
2. Stall Output	N.O.	N.C.
3. Auto / K.A.	Automatic	Knowing Act
4. Future Use		

Fully Automatic	Knowing Act
1. ON	1. ON
2. ON	2. ON
3. OFF	3. ON
4. OFF	4. OFF




NOTE:

For Knowing Act Applications all activation devices must connect to the purple wires from the OC-904 control (**N.O. Dry Contact Only.**) Push/Pull activation must be **DISABLED** at the door control.

CONTROL SETTING NOTES:

For Software Version below 1.1 verify that Solid 2 is set to Flashing 2 and Solid 4 is set to Flashing 2.

For Software Version 1.1 or higher verify that Solid 2 is set to Flashing 5. This achieves door opening voltage on pins 11&12.

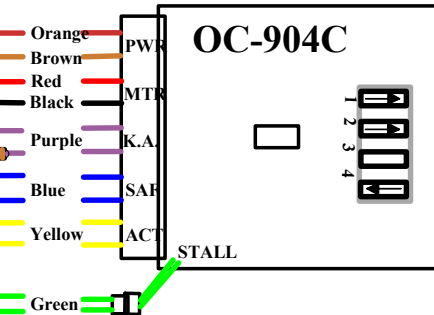

INSTALLATION NOTES:

1. Set door speeds and verify proper door operation prior to final connection of sensor system.
2. Technician **MUST WALK TEST** to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.

Title: Tormax TTX II Single with Elite	Drawing # 01TORITXIIELI01
Drawing By: RNG	Date: 6/17/08
Sheet: 1 of 1	
Optex Technologies Inc. 3882 Del Amo Blvd., Suite 604, Torrance, CA 90503 Office: (800)877-6656, Fax: (310)214-8655	