



FTN-R/RAM

- Complete battery operation
- Digital Anti-masking (RAM only)
- 5m/2m narrow range
- 190° horizontal flexibility
- Perfect pet immunity
- Super Multi Dimension Analysis Logic
- Double conductive shielding
- Intelligent AND logic




OPTEX



FTN-R/RAMi

Wiring Guide

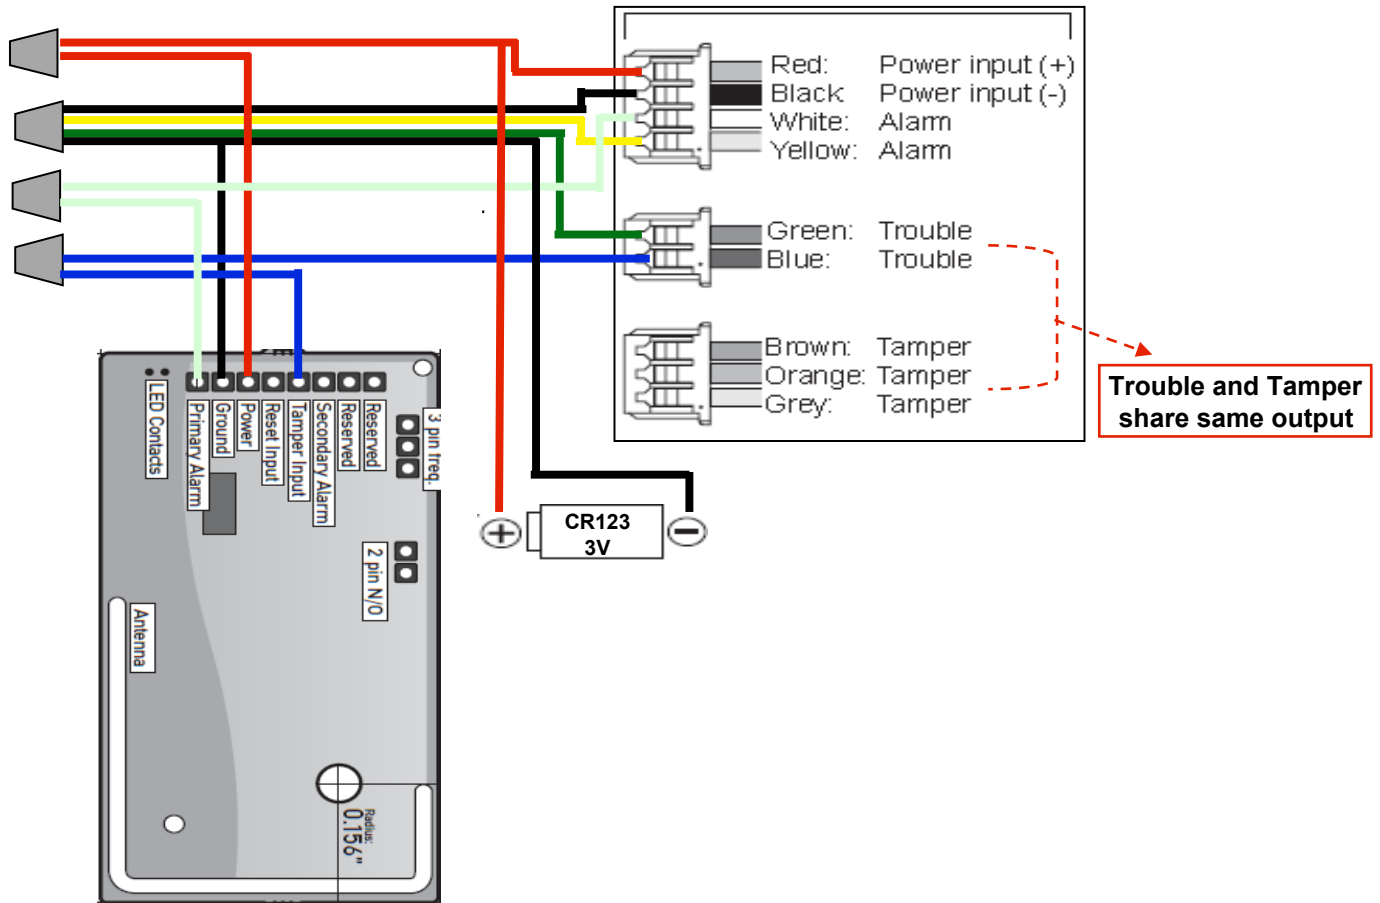

Harness Wiring	EN1941
WHITE	Primary Alarm - N/C Detector Alarm
BLACK	NEGATIVE/ALL COMMONS/SHARED
RED	POSITIVE POWER/SHARED
BROWN	RESET INPUT/NOT USED
BLUE	TAMPER INPUT/Detector Tamper
GREEN	SECONDARY ALARM - NOT USED

(Low Battery is built into EN1941 and Shared with Detector Power)

OPTEX INCORPORATED (USA)
 TEL: +1-909-993-5770
 Tech: (800) 966-7839
 URL: <http://www.optexamerica.com>